

## FEATURES

- Easy replacement
- Economical version
- Rigid & easy installation
- Adjustable counter weight

## APPLICATION

- Water & Non-corrosive
- Pump control & protection


### Single Point



### STANDARD SPECIFICATIONS

Material of wetted parts (Float & Counter weight)	: Polypropylene
Switch type	: Micro switch, 1 SPDT
Switch rating	: 16A / 250VAC
Mounting	: Vertical
Extension cable	: PVC
Enclosure protection	: IP 68
Max. Operating Temperature	: 60°C
Max. Operating Pressure	: 4 bar
Min. Specific Gravity	: 0.8

### DIMENSIONAL DRAWING

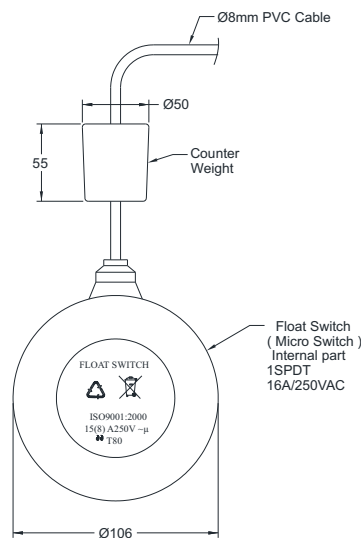

All dimensions are in mm.

### ORDERING CODES

#### 1. BASIC MODEL

**H8** Type 8

**H8**

#### 2. CABLE LENGTH

**001** 1 Meter  
**005** 5 Meter  
**010** 10 Meter

**005**

Ordering Example : L304-H8-005