

FEATURES

- Selection of 4, 6, 8, 10, 12, 14, 16 & 18 outlet ports

APPLICATION

- Distribution applications in Skids

Direct / Remote Mounting



STANDARD SPECIFICATIONS

No. of ports	:	8 ports
Wetted parts	:	AISI 316 SS
Instrument connection	:	1/2" NPT (F) / 1/2" BSP (F)
Stem packing	:	PTFE
Process connection	:	1/2" NPT (F) / 1/2" BSP (F)
Stem	:	Conical metal tip
Max. working pressure	:	413.7 bar (6000 psi)
Max. working temperature	:	240°C
"T" bar handle	:	AISI 304 SS
Drain port	:	1/2" NPT (F), plugged

ORDERING CODES

1. NO OF PORTS

04	4 ports	06	6 ports	08	8 ports
10	10 ports	12	12 ports	14	14 ports
16	16 ports	18	18 ports		

2. WETTED PARTS

MF	AISI 316 SS	MG	AISI 316L SS
-----------	-------------	-----------	--------------

3. INSTRUMENT CONNECTION

02N	1/4" NPT (F)	04N	1/2" NPT (F)	02B	1/4" BSP (F)
04B	1/2" BSP (F)				

4. STEM PACKING

P	PTFE	G	Grafoil
----------	------	----------	---------

5. PROCESS CONNECTION


02N	1/4" NPT (F)	04N	1/2" NPT (F)	02B	1/4" BSP (F)
04B	1/2" BSP (F)				

6. OTHER OPTIONS


XY	Circular Handle	TN	Tested to NACE standards
TO	Certification for Oxygen service	TM	Material test certificate 2.2
TH	Hydro test certificate	TC	Material test certificate 3.1
XL	Marking by laser		

Ordering Example : M201-08-MF-04N-P-04N-XL

DIMENSIONAL DRAWING

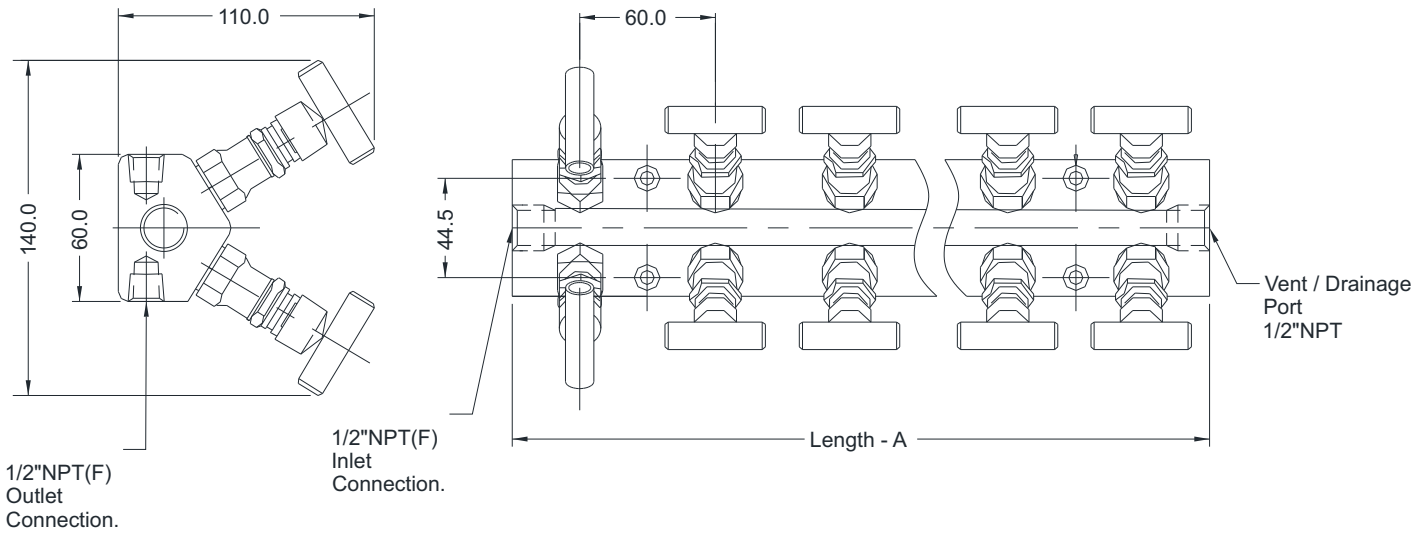

Number of Outlet Connections	Length A (in. mm)
4	5.35 (136)
6	7.72 (196)
8	10.1 (256)
10	12.4 (316)
12	14.8 (376)
14	17.2 (436)
16	19.5 (496)
18	21.9 (556)



All dimensions are in mm.

APPLICABLE ACCESSORIES

- A506 Mounting bolts
- A507 Ring for flanged seal
- A508 Sealing gasket

NOTES:

1. 1. Other connections are available, please contact factory for details.
2. Valve stem dust covers shall be identified with color codes according to their function as Blue = ISOLATE, Green = EQUALIZE & Red = DRAIN / VENT.